


- NOTES:
- DIMENSIONS A, B, C, & F ARE REQUIRED
 - MINIMUM HEADER HEIGHT IS 6-1/4 [158.75]
 - LIMITS FOR "G": 8" RADIUS (G = 3" TO 4-1/4")
10" RADIUS (G = 4-1/2" TO 6-1/2")
 - CHART PLACES HORIZONTAL TRACK AS HIGH AS POSSIBLE

HEADER WITHOUT DOOR HANG DOWN

2376 7176	10"	6-1/2"	10" 11-4/11-5	1336-1/-2	3-1/2"
COUNTER BALANCE	F	G	H	TOP CLOSURE BRACKET P/N	I
	EFFECTIVE HEADER	TRACK HEIGHT FROM HEADER	TRACK RADIUS & P/N		TRACK TO CEILING



2376 OR 7176	9-3/4"	6-1/2"	10"	1336-1 1336-2	3-1/4"
	9-1/2"	6-1/4"			
2376	9-1/4"	6"	11-4 11-5	OPTIONAL 1336-5 SS 1336-6 SS	3-1/4"
	9"	5-3/4"			
	8-3/4"	5-1/2"			
	8-1/2"	5-1/4"			
	8-1/4"	5"			
	8"	4-3/4"			
2376	7-3/4"	4-1/2"	8"	OPTIONAL 1336-3 1336-4	3-1/4"
	7-1/2"	4-1/4"			
	7-1/4"	4"			
	7"	3-3/4"			
	6-3/4"	3-1/2"			
	6-1/2"	3-1/4"			
	6-1/4"	3"	11-2 11-3	1336-7 SS 1336-8 SS	

A	B	C	D	E	F	G	H	I		
SILL TO HEADER	WALL TO WALL	POST TO POST	DOOR WIDTH	VERTICAL TRACK	COUNTER BALANCE	EFFECTIVE HEADER	TRACK HEIGHT FROM HEADER	TRACK RADIUS & P/N	TOP CLOSURE BRACKET P/N	TRACK TO CEILING

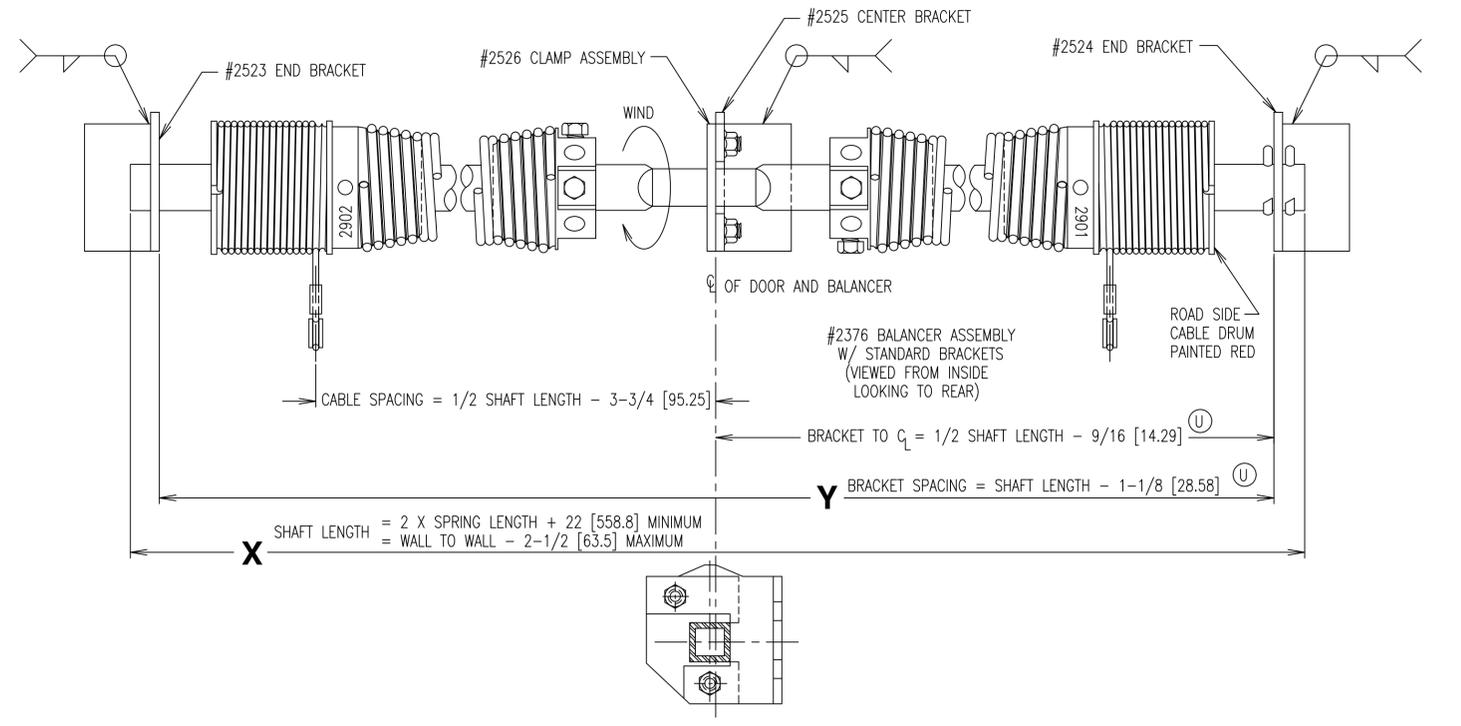

CURB SIDE

ROAD SIDE

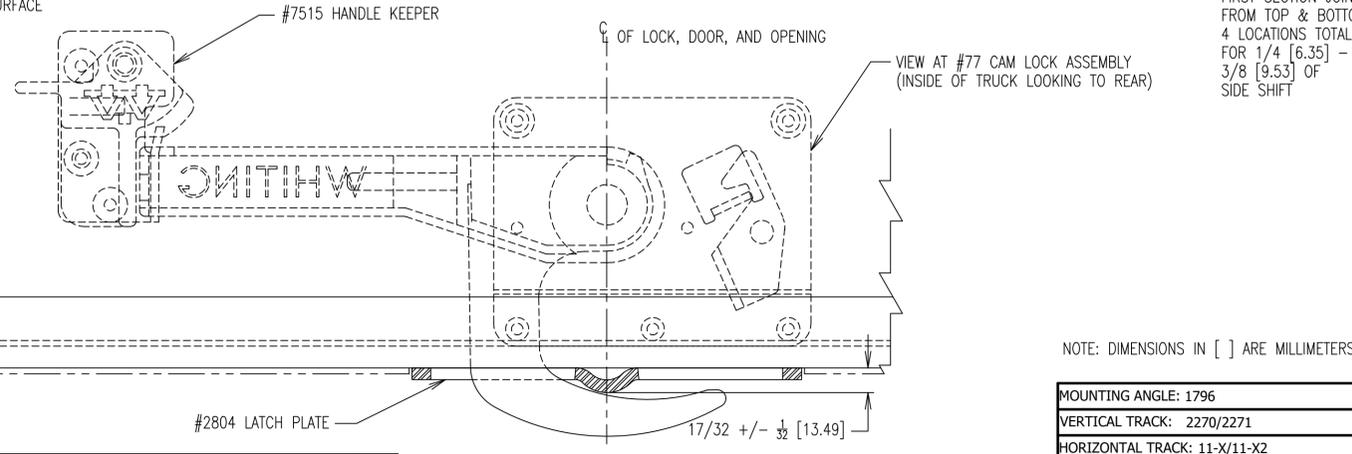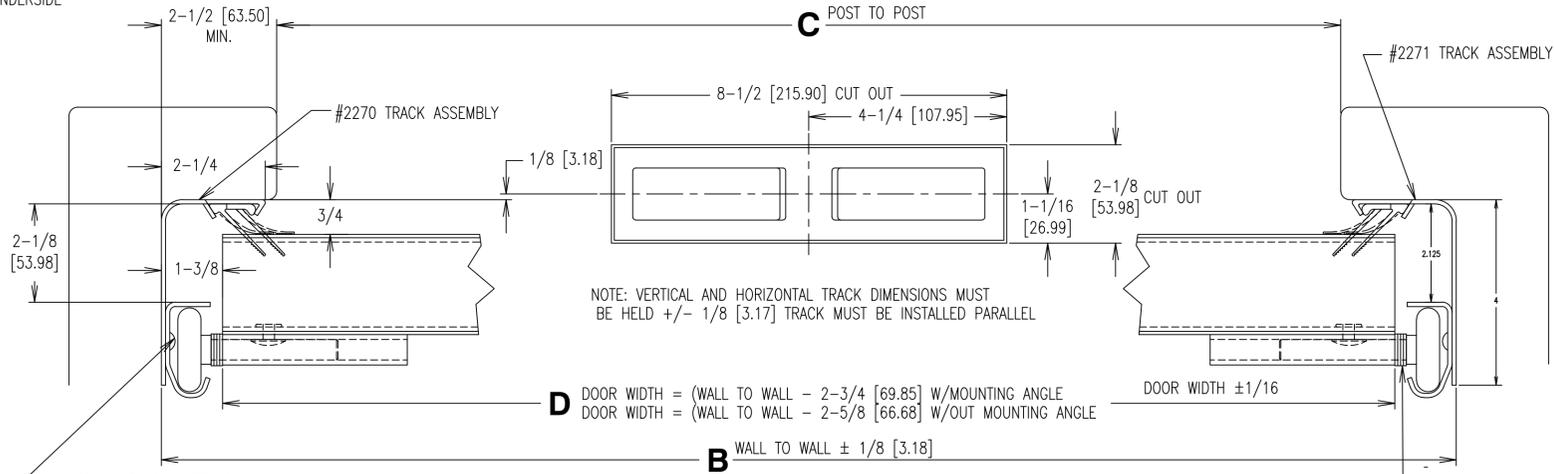

NOTE: DIMENSIONS IN [] ARE MILLIMETERS

MOUNTING ANGLE: 1796
VERTICAL TRACK: 2270/2271
HORIZONTAL TRACK: 11-X/11-X2

9/25/18	V	CLEARANCE IN TRACK 5/32 TO 3/32	MJS	NMM
10/26/11	U	1-1/8 WAS 1-1/4, 9/16 WAS 5/8	MJS	KCL
12/2/09	T	ADDED MINIMUM CLEARANCE	MJS	GSB
8/12/09	S	ADDED CHART FOR NO HANG DOWN	MJS	GSB
6/13/08	R	REVISED PRINT, ADDED CHART	MJS	GSB
DATE	SYM	DESCRIPTION OF CHANGE	AUTH	DR

WILLING

Quality Products for the Transportation Industry

OFFICE: 716-642-6427 113 CEDAR ST., AKRON NY

DR. BY: CAP DATE: 6/20/72

SALES REP: HOUSE TERRITORY: -

DO NOT SCALE DRAWING

DOOR TYPE: 2-1/8" COLDSAVER DOOR
STANDARD INSTALLATION
2-1/8" COLDSAVER DOOR
2-1/8" TRACK SPACING
SCALE 1/2" = 1"
DRAWING # D-1946
REV. V